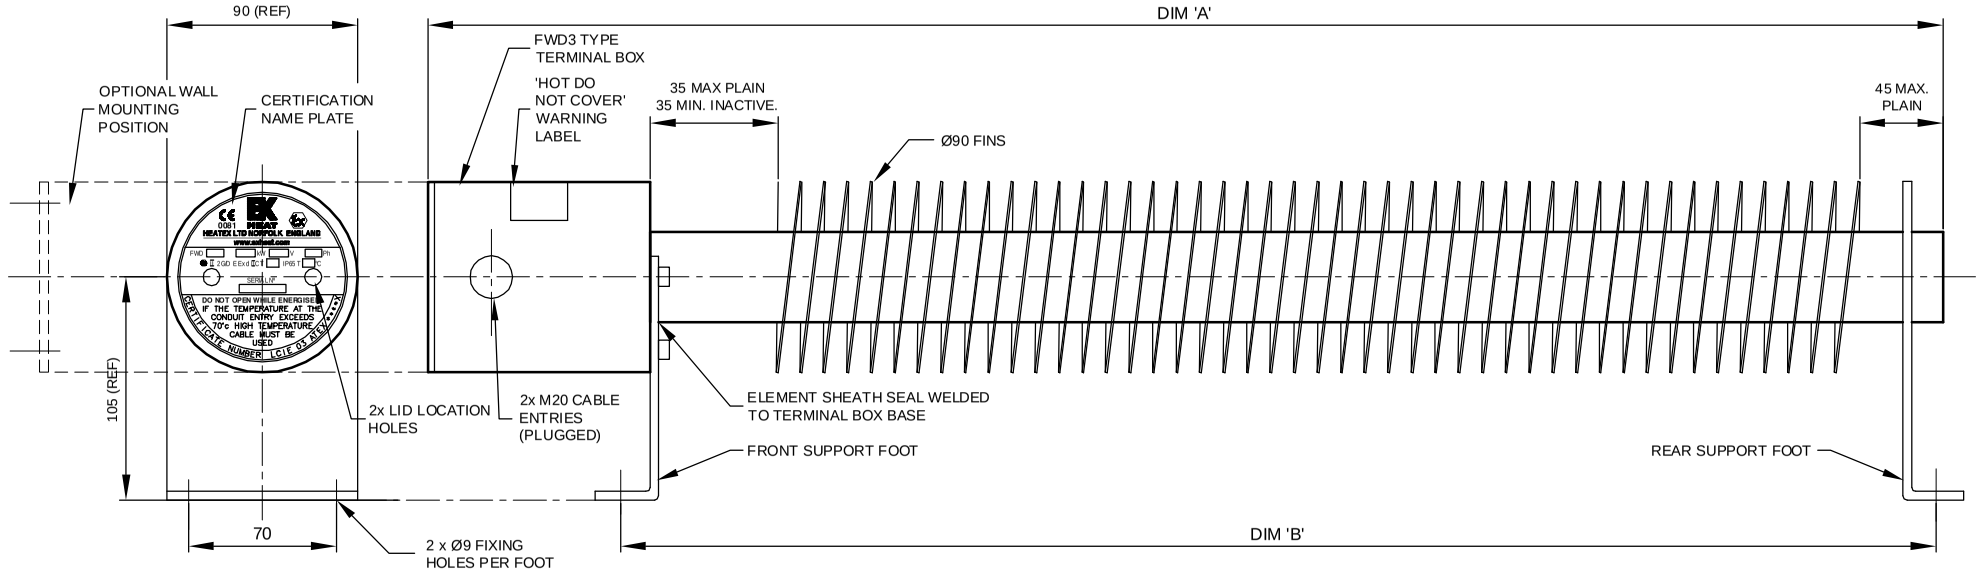

ILLUSTRATION

NOTES

1. RATING & SUPPLY: (SEE TABLE.)
2. MATERIAL:
   TERMINAL BOX, ELEMENT SHEATH AND FEET, (SEE TABLE.)
3. FINISH - STAINLESS STEEL NATURAL.
   - MILD STEEL PAINTED EH5 HAMMER GREY.
4. HEATING ELEMENTS:
   1 x REMOVABLE CERAMIC CORE TYPE HOUSED IN (Ø1½") Ø42,5mm FINNED SHEATH.
5. SPECIFICATION:
   ⟨Ex⟩ II 2G/D EExd IIC (FOR TEMPERATURE CLASS SEE TABLE) FLAMEPROOF & DUST IGNITION PROTECTED HEATER. EN50014, EN50018 & EN50281-1-1.
6. CABLE ENTRIES:
   2x M20 x 1,5p SUPPLIED PLUGGED.
7. MOUNTING:
   HEATER MAY BE FLOOR or WALL MOUNTED PROVIDED THE FINNED SHEATH REMAINS HORIZONTIAL.

MODEL	STOCK CODE	LOADING	VOLTAGE	DIM 'A'	DIM 'B'	WEIGHT	MATERIAL	TEMPERATURE CLASS			
								40°C MAX. AMBIENT		60°C MAX. AMBIENT	
								GAS	DUST	GAS	DUST
FWD-500-T3	S64-005-000	500W	240V	800	670	9kg	MILD STEEL	T3	T200°C	T2	T300°C
FWD-1000-T3	S64-010-000	1000W	240V	1300	1170	12kg					
FWD-1500-T3	S64-015-000	1500W	240V	1900	1770	17kg					
FWD-2000-T3	S64-020-000	2000W	240V	2450	2320	20kg					
FWD-500-T4	S64-005-004	500W	240V	1300	1170	12kg	MILD STEEL	T4	T135°C	T3	T200°C
FWD-750-T4	S64-007-504	750W	240V	1900	1770	17kg					
FWD-1000-T4	S64-010-004	1000W	240V	2450	2320	20kg					

CONTROLLED COPY

REV.	COMMENTS	DATE	DRWN	CHKD	APPR
1	FIRST ISSUE	14/11/03	MJP	GB	RW

HEAT
www.exheat.com

THIS DRAWING IS THE COPYRIGHT AND PROPERTY OF
HEATEX LTD
NORFOLK ENGLAND
Certificate No. FM 26078

SCALE: NOT TO SCALE
3rd ANGLE PROJECTION
TOLERANCES UNLESS OTHERWISE STATED
0 : 1.5mm
0.0 : 0.5mm
0.00 : 0.25mm
0.000 : 0.1mm
ANGULAR : 2°

ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED
DO NOT SCALE !
IF IN DOUBT, ASK !
WHERE ELECTRONIC DOCUMENTS ARE SUPPLIED, THE END PRODUCT MUST CONFORM TO THE PAPER ORIGINAL.

TITLE: FWD TYPE FLAMEPROOF AIR WARMER GENERAL ARRANGEMENT
STOCK CODE No.:
HEATEX DRAWING No.: 3010-06-S1
SHEET No.: 01 of 01
REV: 01
PRODUCT : FWD TYPE FLAMEPROOF AIR WARMER
FORMAT: AutoCAD 2000

PDF created with pdfFactory trial version www.pdffactory.com